

Data sheet


Part No.	KM LG
Description	grip type coupler, chlorine-free for waterproof and tight connection of pliable conduits especially for use in concrete installation, protection type IP65, extraction resistance 250 N
Colour	light grey, similar to RAL 7035
Fire Behaviour	non flame propagating
Classification	IP 65

Standard: EN 61386-1, EN 61386-22



Working temperature

-25 to +90 °C



Art. No.	For tube diameter	PU	PU
085725	16 mm	100 pc	1200 pc
083837	20 mm	100 pc	800 pc
083839	25 mm	50 pc	600 pc
085924	32 mm	25 pc	300 pc
102331	40 mm	25 pc	200 pc
102332	50 mm	15 pc	120 pc
102333	63 mm	8 pc	64 pc

Further technical details

Details	
Halogen free	False
Model	Extraction proof
Material	PE

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.

Data sheet


Part No.	KM GR
Description	grip type coupler, chlorine-free for waterproof and tight connection of pliable conduits especially for use in concrete installation, protection type IP65, extraction resistance 250 N
Colour	grey, similar to RAL 7037
Fire Behaviour	non flame propagating
Classification	IP 65

Standard: EN 61386-1, EN 61386-22



Working temperature

-25 to +90 °C

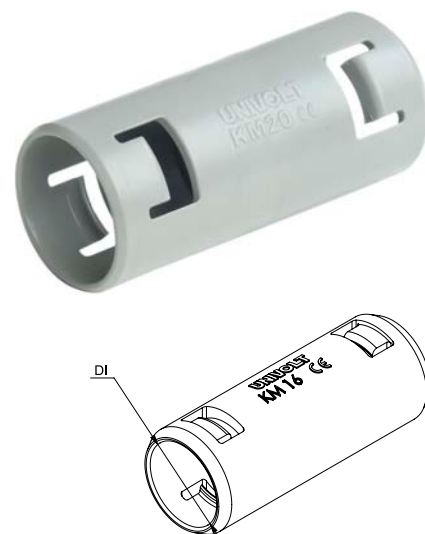

Art. No.	For tube diameter	PU	PU
085724	16 mm	100 pc	1200 pc
083838	20 mm	100 pc	800 pc
083840	25 mm	50 pc	600 pc
085923	32 mm	25 pc	300 pc
102342	40 mm	25 pc	200 pc
102343	50 mm	15 pc	120 pc
102344	63 mm	8 pc	64 pc

Further technical details

Details

Halogen free	False
Model	Extraction proof
Material	PE


Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.

Data sheet

Part No.	KM OR
Description	grip type coupler, halogen-free for waterproof and tight connection of pliable conduits especially for use in concrete installation, protection type IP65, extraction resistance 250 N
Colour	orange, similar to RAL 2004
Classification	IP 65

Standard: EN 61386-1, EN 61386-22



Working temperature

-25 to +90 °C

Art. No.	For tube diameter	PU	PU
085723	16 mm	100 pc	1200 pc
080642	20 mm	100 pc	800 pc
080643	25 mm	50 pc	600 pc
085925	32 mm	25 pc	300 pc
102338	40 mm	25 pc	200 pc
102339	50 mm	15 pc	120 pc
102340	63 mm	8 pc	64 pc

Further technical details


Details	
Halogen free	True
Model	Extraction proof
Material	PE

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.

Data sheet

Part No.	KM BK UV
Description	grip type coupler, chlorine-free for waterproof and tight connection of pliable conduits especially for use in concrete installation, protection type IP65, extraction resistance 250 N
Colour	black, similar to RAL 9005
Fire Behaviour	non flame propagating
Classification	IP 65

Standard: EN 61386-1, EN 61386-22



Working temperature

-25 to +90 °C

UV stabilized

true – up to 10 years

Art. No.	For tube diameter	PU	PU
085726	16 mm	100 pc	1200 pc
084051	20 mm	100 pc	800 pc
084052	25 mm	50 pc	600 pc
085926	32 mm	25 pc	300 pc
102335	40 mm	25 pc	200 pc
102336	50 mm	15 pc	120 pc
102337	63 mm	8 pc	64 pc

Further technical details

Details

Halogen free	False
Model	Extraction proof
Material	PE

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.