

Data Sheet

Product Name: **2012,5BLH; 2012,5BADLH
and accessories**

Description: cable trunking, halogen-free, 2m;
2012,5BADLH: adhesive

Colour: white, similar to RAL 9010


Fire behaviour: non-flame propagating

Applicable standard: IEC 60754, EN 50085



Cable Trunkings:

material	impact strength	temperature range	UV-stable
PC-ABS	2J	-25 °C / +60 °C	L1

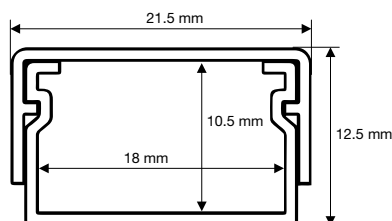

Accessories

material	impact strength	temperature range	UV-stable
ABS	2J	-25 °C / +60 °C	L1

external angle internal angle flat angle flat tee connector stop end



AE2012,5B	AI2012,5B	AP2012,5B	GT2012,5B	GU2012,5B	TT2012,5B
------------------	------------------	------------------	------------------	------------------	------------------

Package Quantities:

product	small package [m]	large package [m]
2012,5BLH	80	12200
2012,5BADLH	70	9800

product	small package [pcs]	large package [pcs]
AE2012,5B	50	3750
AI2012,5B	50	2700
AP2012,5B	50	2700
GT2012,5B	50	1500
GU2012,5B	50	4800
TT2012,5B	50	4800

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.