

Data Sheet

Product Name: **6040BLH and accessories**

Description: cable trunking, halogen-free, 2m;

Colour: white, similar to RAL 9010


Fire behaviour: non-flame propagating

Applicable standard: IEC 60754, EN 50085



Cable Trunkings:

material	impact strength	temperature range	UV-stable
PC-ABS	2J	-25 °C / +60 °C	L1

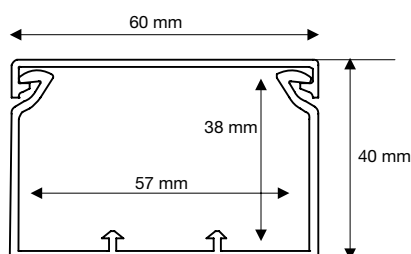

Accessories

material	impact strength	temperature range	UV-stable
ABS	20J	-15 °C / +90 °C	L1

external angle

internal angle

flat angle

flat tee

connector

stop end

divider



AE6040B

AI6040B

AP6040B

GT6040B

GU6040B

TT6040B

S8040LH

Package Quantities:

product	small package [m]	large package [m]
6040BLH	32	1920

product	small package [pcs]	large package [pcs]
AE6040B	25	-
AI6040B	25	-
AP6040B	25	-
GT6040B	10	-
GU6040B	50	-
TT6040B	25	750
S8040LH	50	-

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.