

# Data sheet

Part No. **FXPR GY CAT7-LAN1000 duplex**

Description pliable conduit, corrugated  
medium compression resistance,  
medium impact resistance


Colour grey, similar to RAL 7037

Fire Behaviour non flame propagating

Classification 33412

Compression resistance > 750 N

Standard: EN 61386-22

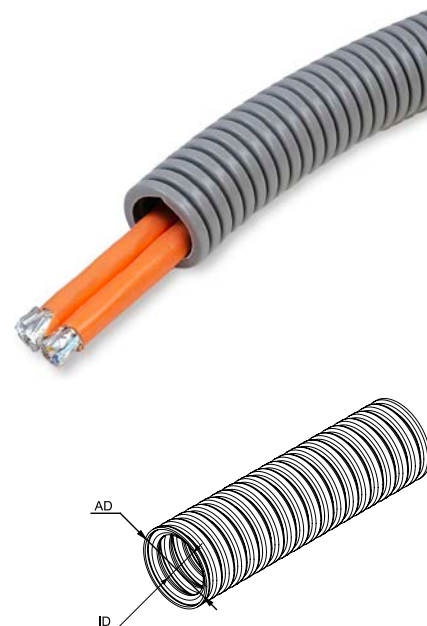

Compressive strength class  
Medium (class 3)

Impact strength  
Medium (class 3)

Operating temperature  
0 to +60 °C

Art. No.	Item code	ED	ID	PU	PU
105940	FXPR 25 GY + CAT7/LAN 1000 duplex	25 mm	17,8 mm	50 m	1200 m

## Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	False
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

## Further technical details

Details	
Halogen free	False
High conducting inner coating	False
Fire retardant version	True
Material	PVC-U

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.