


# Data sheet

Part No.	<b>HFXPR BK H07Z1-6</b>
Description	pliable insulating conduit, halogen-free, corrugated, with turbo grooves, pre-wired  medium compression resistance, medium impact resistance
Colour	black, similar to RAL 9005
Fire Behaviour	non flame propagating
Classification	33432
Compression resistance	> 750 N

Standard: EN 61386-1, EN 61386-22

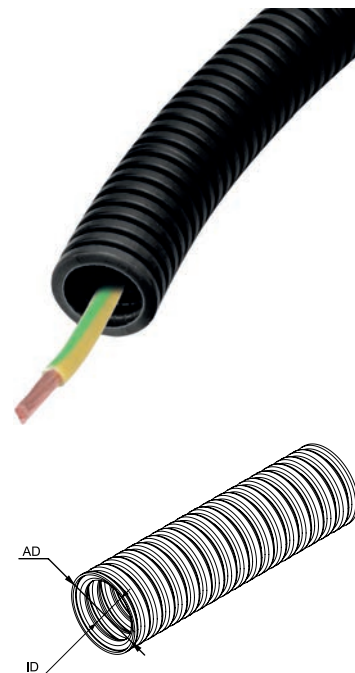

Compressive strength class	Impact strength	Operating temperature
Medium (class 3)	Medium (class 3)	-10 to +70 °C

Art. No.	Item code	ED	ID	PU	PU
100322	HFXPR 20 BK + H07Z1-K 6 GE/GN	20 mm	13 mm	50 m	2000 m

## Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	True
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

## Further technical details

Details	
Halogen free	True
High conducting inner coating	True
Fire retardant version	True
Material	PP-Blend

Cardboard packaging used is made from 100% waste paper and is fully recyclable,  
plastic packaging is fully recyclable.