


Data sheet

Part No.	SB LG
Description	normal bend for the connection of rigid conduits in an angle of 90°, especially for enclosed installations dimensions 16 to 25 with moulded-on coupler, dimensions 32 and above with intended coupler
Colour	light grey, similar to RAL 7035

Standard: EN 61386-1, EN 61386-21

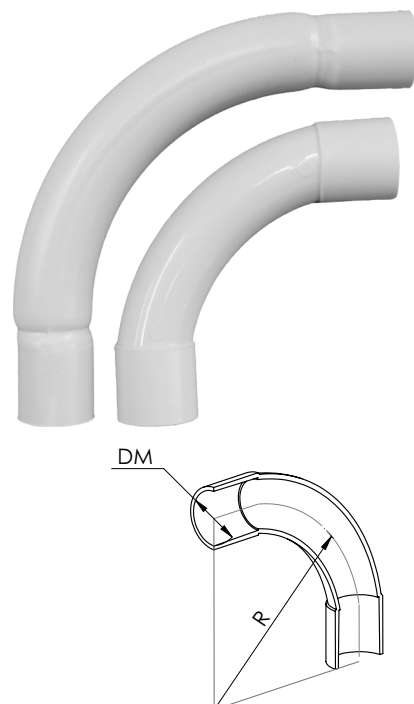

Working temperature
-5 to +60 °C

Art. No.	For tube diameter	Radius	PU	PU
109909	16 mm	82 mm	50 pc	600 pc
109910	20 mm	85 mm	25 pc	300 pc
109911	25 mm	89 mm	25 pc	200 pc
020625	32 mm	125 mm	50 pc	1200 pc
020626	40 mm	160 mm	35 pc	840 pc
020627	50 mm	210 mm	20 pc	480 pc
065499	63 mm	270 mm	8 pc	280 pc

Further technical details

Details

Model	Plug-in
With inspection opening and cover	false
Angle	90 °
Material	PVC-U

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, office@dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.